

WEIGHTED BY
FATSAC

FLIPSURF

Ride the Perfect Wave Anywhere.

- Extra large face to maximize water displacement and boost the size of the wave.
- Strong magnetic grip holds FlipSurf® onto the boat better than suction cups or Velcro.
- Switch sides of the boat in seconds.
- FlipSurf® is made of light, durable material that floats.
- Adjustable angles to customize your perfect wave.
- Collapsible for easy storage.



Fat Sac Manufacturing
414-964-3668
support@FatSac.com


www.flipsurfwake.com — www.FatSac.com

How To Install FlipSurf®




Step 1

Thoroughly clean near the rear starboard and portsides with residue free cleaner such as 70% Isopropyl alcohol. Installation should be done when boat, product, and ambient temperature are above 70°F.

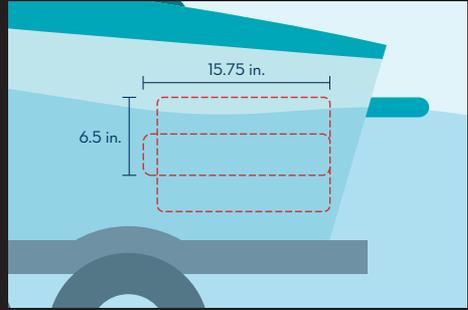


Step 2

FlipSurf® requires 6.5" x 15.75" of flat surface to mount to. Once located, align FlipSurf so top edge sits 1-2" above or below waterline when ballasts are full. Position as far back on the boat as possible.

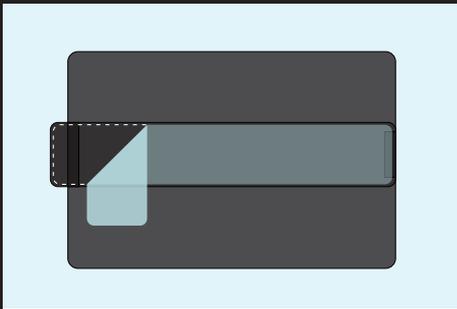

Step 3

Peel off adhesive backing on mounting bracket.

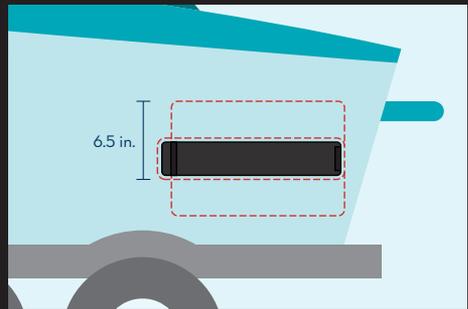

Step 4

Firmly press mounting bracket onto boat in the location identified in Step 2. Allow strip to sit for 30 minutes minimum before use or submerging in water.

! CAUTION

FlipSurf® contains strong magnets. Persons with medical implants or other medical devices, credit/debit cards, cell phones, harddrives, etc. Should remain 12" (30cm) from product.

Do not adjust FlipSurf® while the boat is in motion. Possible pinch hazard.

This product is intended for inboard boats only. Do not use with outboard boats.

Do not use at speeds in excess of 15 mph. Remove FlipSurf® when not surfing.



Scan for installation video



Scan to buy product on FatSac.com

www.flipsurfwake.com
www.FatSac.com